

**WP**  
MODEL

**POWER  
PALLET TRUCK**

**CAPACITY**  
**2.0 ton**  
**LIFTING HEIGHT**  
**110 mm.**





**Model**

**WP15-20**  
**EPS**  
SERIES

AC DRIVING SYSTEM  
DC LIFTING MOTOR  
TRACTION BATTERY  
ELECTRIC POWER STEERING

Reliable ride to speed up time  
by tough engineered truck

 DRAWINGS FOR  
SPECIFICATIONS

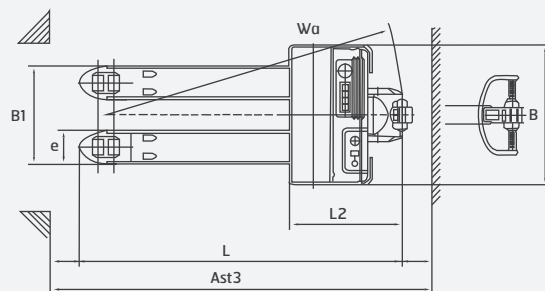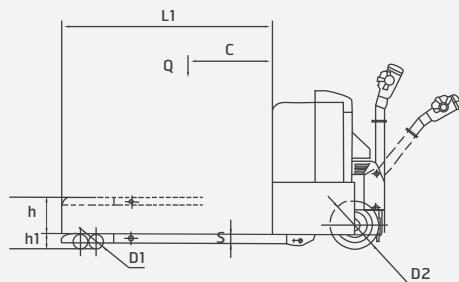

## SPECIFICATIONS

MODEL			WP15-20	
CHARACTERISTICS	Q	Capacity	kg	2000
	C	Load Centre	mm	600
		Operator Type		rider
		Electric Power Steering(EPS)		standard equipped
DIMENSIONS	h	Lifting Height	mm	110
	h1	Ground Clearance + Fork Thickness	mm	85
	B1	Standard Fork Width	mm	540/685
	L1	Fork Length	mm	1150/1200
	S	Fork Thickness	mm	55
	E	Fork Width	mm	185
	L	Overall Length	mm	1750
	L2	Rear Length	mm	600
	B	Overall Width	mm	720
	Wa	Minimum Turning Radius	mm	1655/1705
	Ast3	Aisle Width (800x1200mm Pallet) : Horizontal/vertical	mm	2255/2355
	Ast3	Aisle Width (1000x1200mm Pallet) : Horizontal/vertical	mm	2405/2455
PERFORMANCE	Maximum Travelling Speed	Laden	km/h	4.5
		Unladen	km/h	4.5
	Maximum Lifting Speed	Laden	km/h	0.056
		Unladen	m/s	0.06
	Maximum Lowering Speed	Laden	m/s	0.057
		Unladen	m/s	0.059
Gradeability	Laden	%	5	
	Unladen	%	7	
WEIGHT	Service Weight Without Battery		kg	380
	Service Weight With Battery		kg	600
WHEEL	Wheel (Drive/load) Type			PU
	Wheel Quantity			1D+4L/1D+2L
	D2	Size Of Steering Wheel	mm	Ø 248x75
	D1	Size Of Loading Wheel	mm	Ø 80x80(double wheel)
	Size Of Balance Wheel		mm	Ø 115x55
	Wheel Base		mm	1250/1300
Travelling Motor		kw	1.5 AC	
DRIVING SYSTEM	Lifting Motor		kw	2.0 DC
	Battery Type/Capacity		v/ah	24v/210Ah
	Maximum Battery Box Size(L*W*H)			650x200x530
	Travelling Brake			regenerate
	Brake Type			electromagnetic
	Control System			CURTIS 1230-2402

\*The Specification is subject to change without prior notice.